


Product Family Data Sheet Rev. 5.0 2025. 10.08

3535 Series

For Horticulture Lighting
植物照明

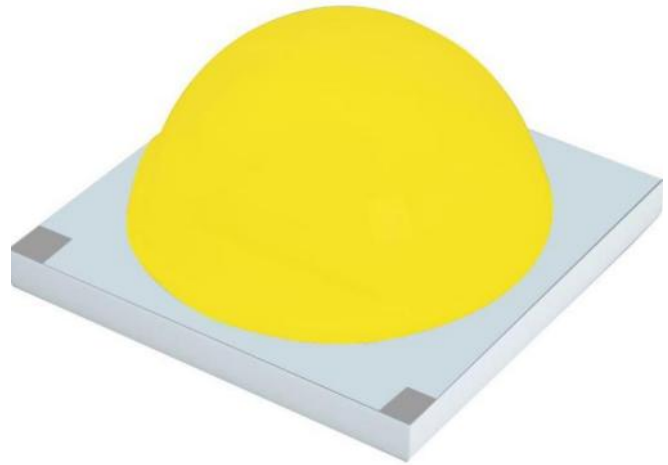

Features & Benefits 特点与优势

- 3 Pad design
三焊盘设计
- Silicone resin for high reliability
高可靠性硅树脂封装
- Standard form factor for design flexibility (3.5 × 3.5 mm)
标准封装尺寸，设计更加灵活
- Wall-Plug Efficiency: Typ. 60.6% @ 350 mA, 25 °C
电-光转换效率典型值：60.6% @ 350 mA, 25 °C

Application应用:



LED封装进口替代首选品牌
First Choice in LED Packaging Category

Table of Contents
目 录

1.	Characteristics 特征	-----	3
2.	Product Code Information 产品编码信息	-----	4
3.	Product Selection Guide 产品选型指南	-----	9
4.	Typical Characteristics Graphs 典型特性曲线	-----	12
5.	Outline Drawing & Dimension 外形尺寸图	-----	14
6.	Reliability Test Items & Conditions 可靠性测试项目及条件	-----	15
7.	Soldering Conditions 焊接条件	-----	16
8.	Tape & Reel 卷装	-----	19
9.	Label Structure 标签结构	-----	21
10.	Packing Structure 包装结构	-----	22
11.	Precautions in Handling & Use 使用注意事项	-----	24
12.	Document Revision History 文件修订记录	-----	25

1. Characteristics 特征

a) Absolute Maximum Rating 极限参数

Item 项目	Symbol 符号	Rating 额定值	Unit 单位	Condition 条件
Operating Solder Point Temperature 焊点工作温度	T _s	-40 ~ 105	℃	-
Storage Temperature 储存温度	T _{stg}	-40 ~ 105	℃	-
LED Junction Temperature LED结温	T _j	125	℃	-
Forward Current 正向电流	I _f	1000	mA	-
Pulse Forward Current 脉冲正向电流	I _{fp}	2000	mA	Duty 1/10, pulse width 10 ms 占空比1/10, 脉冲宽度10毫秒
Soldering Process Temperature 焊接过程温度	-	260 <10	℃ s	-
ESD Withstand Voltage(HBM) 静电耐压 (人体模式)	-	No Zener:2 Zener:6	kV	-

b) Electro-optical Characteristics 光电参数 (I_f = 350 mA, T_j = 25 °C)

Item 项目	Unit 单位	Rank 范围	Min. 最小值	Typ. 典型值	Max. 最大值
Forward Voltage(V _f) 正向电压	V	V0	2.6	-	3.0
Reverse Current(I _r @V _R =5V) 反向电流	μA		-	-	1
Color Rendering Index(R _a) 显示指数	-		68	-	82
Photosynthetic Photon Flux(PPF) 光合光子通量	μmol/s		2.00	-	3.00
Luminous Flux(Φ _v) 光通量	lm	H0	150	-	210
Radiant Flux(Φ _e) 辐射通量	mW		450	-	700
Photosynthetic Active Radiation(PAR) 光合有效辐射	mW		450	-	700
Thermal Resistance 热阻	℃/W		-	3.5	-
Beam Angle 发光角度	°		-	120	-

Note 备注:

Ledestar maintains measurement tolerance of: forward voltage = ±0.1 V, Luminous Flux & Photosynthetic Photon Flux = ±5%, CRI = ±3.
立德达的测试公差保持在: 正向电压=±0.1V, 光通量和光合光子通量=±5%, 显示指数=±3。

2. Product Code Information 产品编码信息

a) Model Code Information 型号编码信息

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21		
L	D	R	-	3	5	3	5	C	L	F	4	0	7	0	-	V	0	A	4	0	H	0

Digit 数位	PKG Information 信息	Code 代码	Specification 规格
1 2 3	Ledstar Package 立德达封装	LDR	
4 5 6 7	Package Model and Size 封装型号尺寸	3535	3.5 x 3.5 x 2.48 mm
8	Product Category 产品类别	C	Ceramics 陶瓷
9	Lead Frame Type 支架类型	L	N: AlN L: Al ₂ O ₃
10	Bonding Wire 键合线	F	Flip chip 覆晶/共晶制程 Z: Au > 99.9% & whit zener 纯金线加齐纳
11 12	Nominal CCT(K) 标称色温	40	27: 2700 30: 3000 35: 3500 40: 4000 50: 5000 57: 5700 65: 6500
13 14	Ra 显示指数	70	70: Typ. 70 80: Typ. 80
15 16	Forward Voltage 正向电压	V0	See the graded list for details 详见分光参数列表
17 18 19	Chromaticity Binning Code 色区代码	A40	AXX: ANSI Standard 美国国家标准学会标准 XXX: IEC Standard 国际电工委员会标准
20 21	Luminous Flux 光通量	H0	See the graded list for details 详见分光参数列表

b) Series Code Information 系列编码信息

1	2		3		4
3	5		1		V

Digit 数位	PKG Information 信息	Code 代码	Specification 规格
1 2	Package Model 封装型号	35	3535
3	Number of Chips 芯片数量	1	1 Chips
4	Chip Size Level 芯片尺寸等级	V	J: 1800 - 2500 mil ² V: 2500 - 4000 mil ² V PLUS: 4000 - 5000 mil ²

c) Voltage Bins 电压分档 ($I_f = 350 \text{ mA}$, $T_j = 25^\circ \text{C}$)

Voltage Rank 电压档	Voltage Bin 电压分档	Voltage Range(V) 电压范围	Voltage Bin 电压分档	Voltage Range(V) 电压范围
E0	E1	2.60 - 2.70	E3	2.60 - 2.65
			E4	2.65 - 2.70
	E2	2.70 - 2.80	E5	2.70 - 2.75
F0			E6	2.75 - 2.80
	F1	2.80 - 2.90	F3	2.80 - 2.85
			F4	2.85 - 2.90
	F2	2.90 - 3.00	F5	2.90 - 2.95
			F6	2.95 - 3.00

Note 备注:

Ledestar defaults to a voltage level of 0.1 V for grading, The total range code is V0.



立德达默认分电压等级为0.1V分档，总范围代码为V0。


d) Luminous Flux Bins 光通量分档 ($I_f = 350 \text{ mA}$, $T_j = 25^\circ \text{C}$)

Luminous Flux Rank 光通量档	Luminous Flux Bin 光通量分档	Luminous Flux Range(lm) 光通量范围	Luminous Flux Bin 光通量分档	Luminous Flux Range(lm) 光通量范围
H0	HR	150 - 160	RS	155 - 165
	HS	160 - 180	ST	170 - 180
	HT	180 - 200	TU	190 - 210

e) Color Bins 颜色分档 ($I_f = 350 \text{ mA}$, $T_j = 25 \text{ }^\circ\text{C}$)

Nominal CCT (K) 标称色温	Color Rank 颜色档	Chromaticity Bin of ANSI ANSI 分档	Chromaticity Bin of IEC IEC 分档
2700	MacAdam 6-step ellipse bin	A27	27K
3000	MacAdam 6-step ellipse bin	A30	30K
3500	MacAdam 6-step ellipse bin	A35	35K
4000	MacAdam 6-step ellipse bin	A40	40K
5000	MacAdam 6-step ellipse bin	A50	50K
5700	MacAdam 6-step ellipse bin	A57	/
6500	MacAdam 6-step ellipse bin	A65	65K

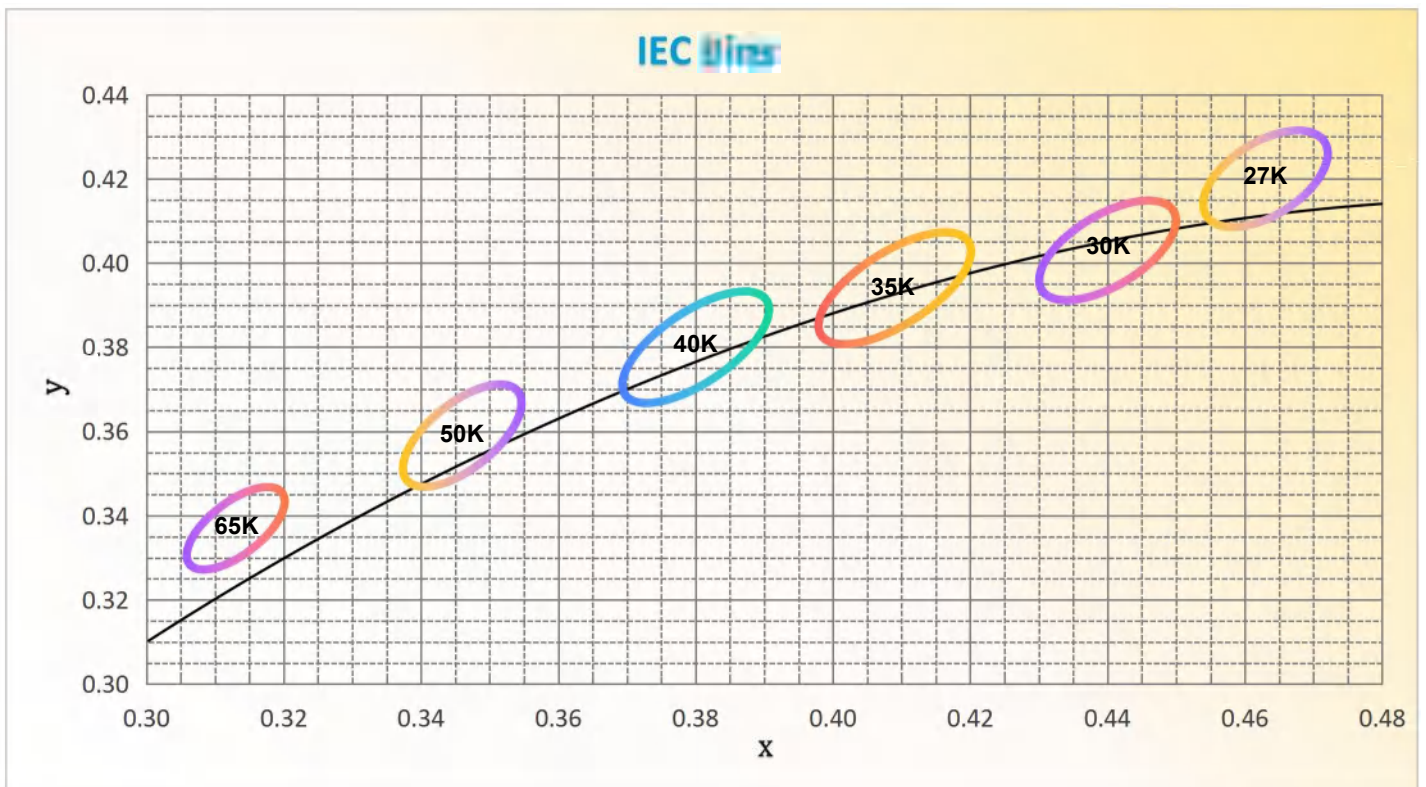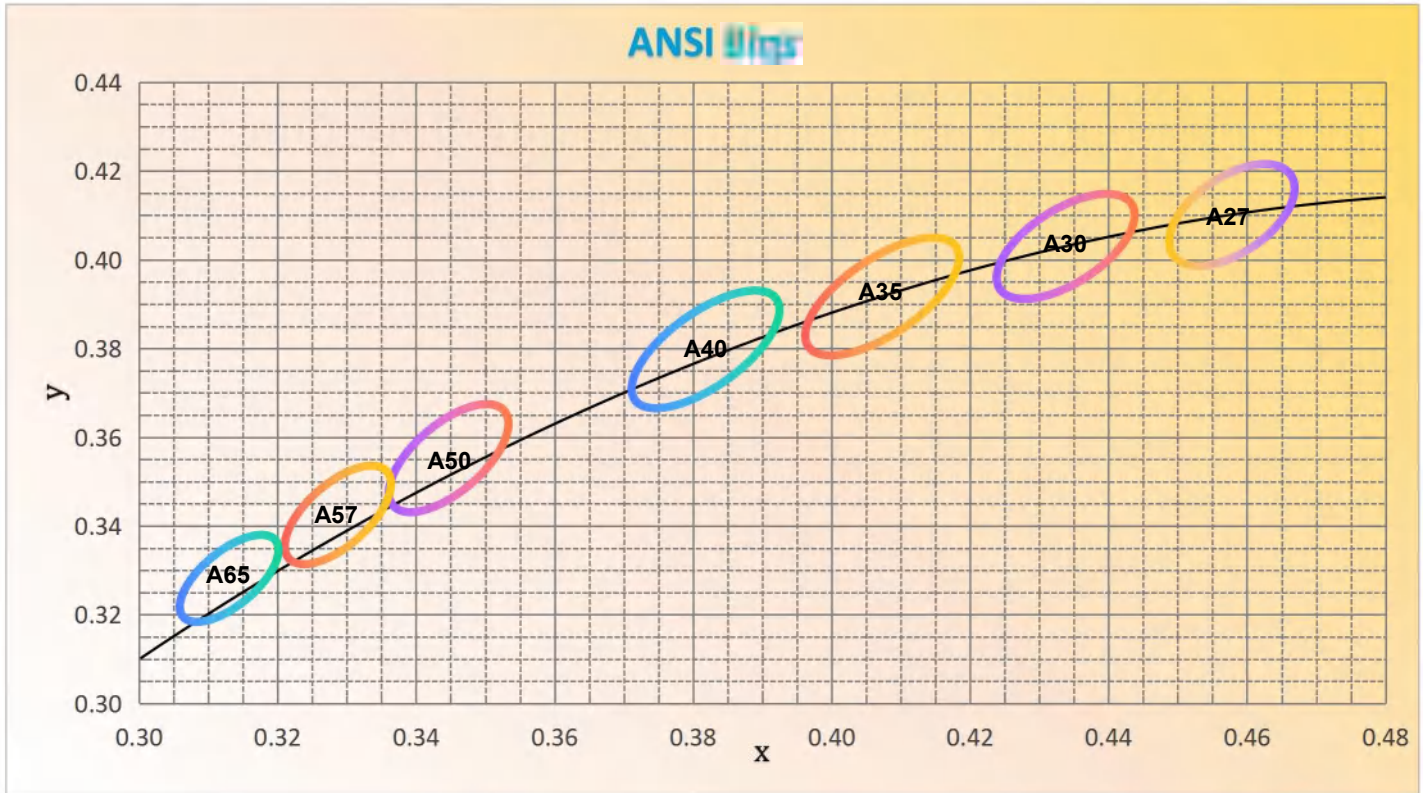f) Chromaticity Region & Coordinates 色度区域与坐标 ($I_f = 350 \text{ mA}$, $T_j = 25^\circ \text{C}$)

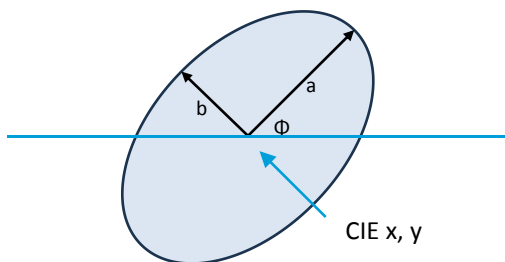

ANSI Bins						
Nominal CCT(K)	CIE x	CIE y	Φ	a	b	Bin
2700	0.4578	0.4101	53°42'	0.01548	0.00822	A27
3000	0.4338	0.4030	53°13'	0.01668	0.00816	A30
3500	0.4073	0.3917	52°58'	0.01902	0.00834	A35
4000	0.3818	0.3797	53°43'	0.01878	0.00804	A40
5000	0.3447	0.3553	59°37'	0.01644	0.00708	A50
5700	0.3278	0.3417	59°05'	0.01488	0.00636	A57
6500	0.3123	0.3282	58°34'	0.01338	0.00570	A65

IEC Bins						
Nominal CCT(K)	CIE x	CIE y	Φ	a	b	Bin
2700	0.4630	0.4200	57°17'	0.01548	0.00822	27K
3000	0.4400	0.4030	53°10'	0.01668	0.00816	30K
3500	0.4090	0.3940	52°58'	0.01902	0.00834	35K
4000	0.3800	0.3800	54°00'	0.01878	0.00804	40K
5000	0.3460	0.3590	59°37'	0.01644	0.00708	50K
6500	0.3130	0.3370	58°23'	0.01338	0.0057	65K

Note 备注:Ledestar maintains measurement tolerance of: $\Delta x, \Delta y = \pm 0.003$ 立德达的测试公差保持在: $\Delta x, \Delta y = \pm 0.003$

3. Product Selection Guide 产品选型指南

Table 1. List of optional models for 351J series, $I_f = 350 \text{ mA}$, $T_j = 25^\circ \text{C}$

表1: 351J系列可选型列表

Series Code 系列代码	Model Code 型号代码	Nominal CCT(K) 标称色温	Ra Typ. 显色指数	Luminous Flux(lm) 光通量	Photosynthetic Photon Efficacy($\mu\text{mol/J}$) 光合光子效率
351J	LDR-3535C*F2770-V0A27H0	2700	70	170 - 200	2.20 - 2.60
	LDR-3535C*F2770-V027KH0				
351J	LDR-3535C*F3070-V0A30H0	3000	70	170 - 200	2.20 - 2.60
	LDR-3535C*F3070-V030KH0				
351J	LDR-3535C*F3570-V0A35H0	3500	70	180 - 210	2.40 - 2.80
	LDR-3535C*F3570-V035KH0				
351J	LDR-3535C*F4070-V0A40H0	4000	70	180 - 210	2.40 - 2.80
	LDR-3535C*F4070-V040KH0				
351J	LDR-3535C*F5070-V0A50H0	5000	70	180 - 210	2.40 - 2.80
	LDR-3535C*F5070-V050KH0				
351J	LDR-3535C*F5770-V0A57H0	5700	70	180 - 210	2.40 - 2.80
351J	LDR-3535C*F6570-V0A65H0	6500	70	180 - 210	2.40 - 2.80
	LDR-3535C*F6570-V065KH0				
351J	LDR-3535C*F2780-V0A27H0	2700	80	150 - 180	2.20 - 2.60
	LDR-3535C*F2780-V027KH0				
351J	LDR-3535C*F3080-V0A30H0	3000	80	150 - 180	2.20 - 2.60
	LDR-3535C*F3080-V030KH0				
351J	LDR-3535C*F3580-V0A35H0	3500	80	160 - 190	2.40 - 2.80
	LDR-3535C*F3580-V035KH0				
351J	LDR-3535C*F4080-V0A40H0	4000	80	160 - 190	2.40 - 2.80
	LDR-3535C*F4080-V040KH0				
351J	LDR-3535C*F5080-V0A50H0	5000	80	160 - 190	2.40 - 2.80
	LDR-3535C*F5080-V050KH0				
351J	LDR-3535C*F5780-V0A57H0	5700	80	160 - 190	2.40 - 2.80
351J	LDR-3535C*F6580-V0A65H0	6500	80	160 - 190	2.40 - 2.80
	LDR-3535C*F6580-V065KH0				

Table 2. List of optional models for 351V series, $I_f = 350 \text{ mA}$, $T_j = 25^\circ\text{C}$

表2: 351V系列可选型列表

Series Code 系列代码	Model Code 型号代码	Nominal CCT(K) 标称色温	Ra Typ. 显色指数	Luminous Flux(lm) 光通量	Photosynthetic Photon Efficacy($\mu\text{mol/J}$) 光合光子效率
351V	LDR-3535C*F2770-V0A27H0 LDR-3535C*F2770-V027KH0	2700	70	160 - 190	2.20 - 2.60
351V	LDR-3535C*F3070-V0A30H0 LDR-3535C*F3070-V030KH0	3000	70	160 - 190	2.20 - 2.60
351V	LDR-3535C*F3570-V0A35H0 LDR-3535C*F3570-V035KH0	3500	70	170 - 200	2.40 - 2.80
351V	LDR-3535C*F4070-V0A40H0 LDR-3535C*F4070-V040KH0	4000	70	170 - 200	2.40 - 2.80
351V	LDR-3535C*F5070-V0A50H0 LDR-3535C*F5070-V050KH0	5000	70	170 - 200	2.40 - 2.80
351V	LDR-3535C*F5770-V0A57H0	5700	70	170 - 200	2.40 - 2.80
351V	LDR-3535C*F6570-V0A65H0 LDR-3535C*F6570-V065KH0	6500	70	170 - 200	2.40 - 2.80
351V	LDR-3535C*F2780-V0A27H0 LDR-3535C*F2780-V027KH0	2700	80	150 - 180	2.40 - 2.80
351V	LDR-3535C*F3080-V0A30H0 LDR-3535C*F3080-V030KH0	3000	80	150 - 180	2.40 - 2.80
351V	LDR-3535C*F3580-V0A35H0 LDR-3535C*F3580-V035KH0	3500	80	160 - 190	2.60 - 3.00
351V	LDR-3535C*F4080-V0A40H0 LDR-3535C*F4080-V040KH0	4000	80	160 - 190	2.60 - 3.00
351V	LDR-3535C*F5080-V0A50H0 LDR-3535C*F5080-V050KH0	5000	80	160 - 190	2.60 - 3.00
351V	LDR-3535C*F5780-V0A57H0	5700	80	160 - 190	2.60 - 3.00
351V	LDR-3535C*F6580-V0A65H0 LDR-3535C*F6580-V065KH0	6500	80	160 - 190	2.60 - 3.00

Table 3. List of optional models for 351V PLUS series, $I_f = 350 \text{ mA}$, $T_j = 25^\circ \text{C}$

表3: 351V PLUS系列可选型列表

Series Code 系列代码	Model Code 型号代码	Nominal CCT(K) 标称色温	Ra Typ. 显色指数	Luminous Flux(lm) 光通量	Photosynthetic Photon Efficacy($\mu\text{mol/J}$) 光合光子效率
351V PLUS	LDR-3535C*F2770-V0A27H0	2700	70	160 - 190	2.40 - 2.80
	LDR-3535C*F2770-V027KH0				
351V PLUS	LDR-3535C*F3070-V0A30H0	3000	70	170 - 200	2.40 - 2.80
	LDR-3535C*F3070-V030KH0				
351V PLUS	LDR-3535C*F3570-V0A35H0	3500	70	170 - 200	2.40 - 2.80
	LDR-3535C*F3570-V035KH0				
351V PLUS	LDR-3535C*F4070-V0A40H0	4000	70	180 - 210	2.40 - 2.80
	LDR-3535C*F4070-V040KH0				
351V PLUS	LDR-3535C*F5070-V0A50H0	5000	70	180 - 210	2.40 - 2.80
	LDR-3535C*F5070-V050KH0				
351V PLUS	LDR-3535C*F5770-V0A57H0	5700	70	180 - 210	2.60 - 3.00
351V PLUS	LDR-3535C*F6570-V0A65H0	6500	70	180 - 210	2.60 - 3.00
	LDR-3535C*F6570-V065KH0				
351V PLUS	LDR-3535C*F2780-V0A27H0	2700	80	150 - 180	2.40 - 2.80
	LDR-3535C*F2780-V027KH0				
351V PLUS	LDR-3535C*F3080-V0A30H0	3000	80	160 - 190	2.40 - 2.80
	LDR-3535C*F3080-V030KH0				
351V PLUS	LDR-3535C*F3580-V0A35H0	3500	80	160 - 190	2.60 - 3.00
	LDR-3535C*F3580-V035KH0				
351V PLUS	LDR-3535C*F4080-V0A40H0	4000	80	170 - 200	2.60 - 3.00
	LDR-3535C*F4080-V040KH0				
351V PLUS	LDR-3535C*F5080-V0A50H0	5000	80	170 - 200	2.60 - 3.00
	LDR-3535C*F5080-V050KH0				
351V PLUS	LDR-3535C*F5780-V0A57H0	5700	80	170 - 200	2.60 - 3.00
351V PLUS	LDR-3535C*F6580-V0A65H0	6500	80	170 - 200	2.60 - 3.00
	LDR-3535C*F6580-V065KH0				

Note 备注:

1. Ledestar maintains measurement tolerance of: forward voltage = $\pm 0.1 \text{ V}$, Luminous Flux = $\pm 5\%$, CRI = ± 3 .

1. 立德达的测试公差保持在: 正向电压 $\pm 0.1 \text{ V}$, 光通量 $\pm 5\%$, 显示指数 ± 3 。


2. The "*" in the model code express optional bonding wire types.

2. 型号代码中 "*" 表示可选键合线类型。


4. Typical Characteristics Graphs 典型特性曲线

a) Spectrum Distribution 光谱图 ($I_f = 350 \text{ mA}$, $T_j = 25^\circ\text{C}$)



CCT: 2700 - 6500K (Ra70)

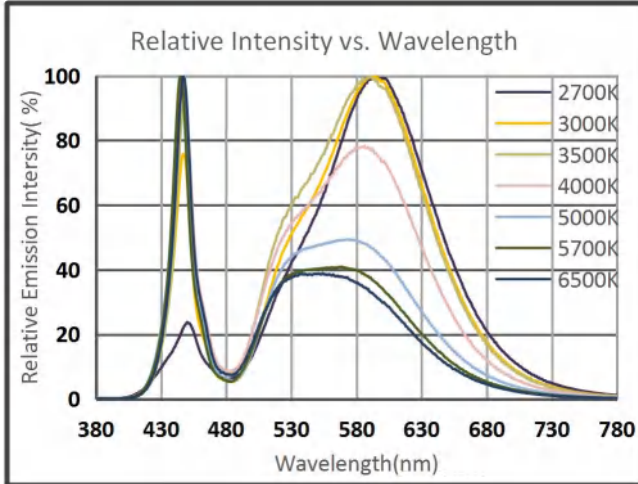



CCT: 2700 - 6500K (Ra80)

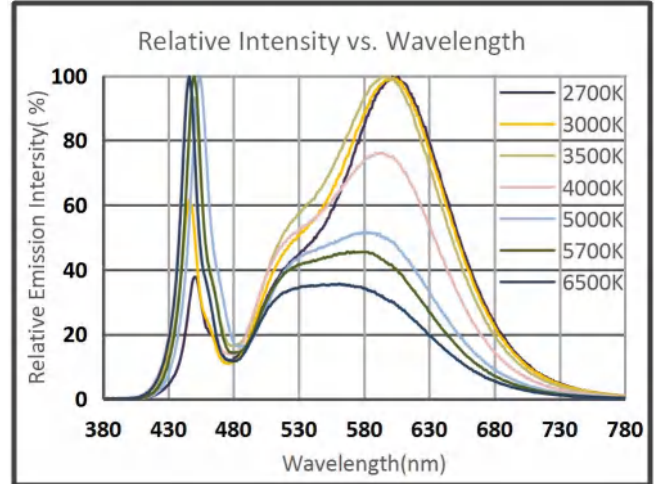


b) Temperature Characteristics 温度曲线 ($I_f = 350 \text{ mA}$)

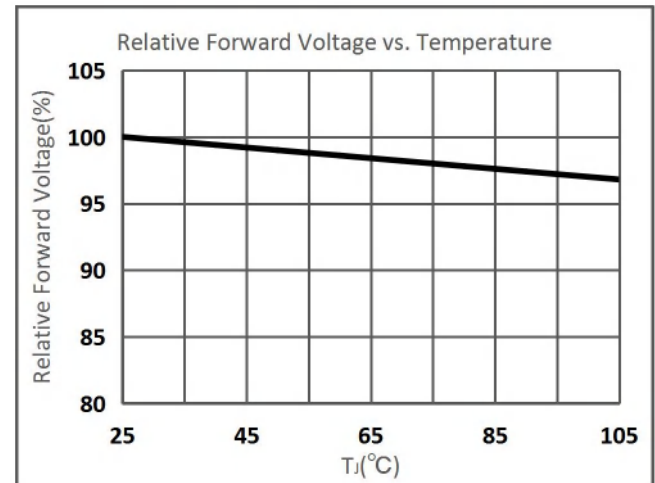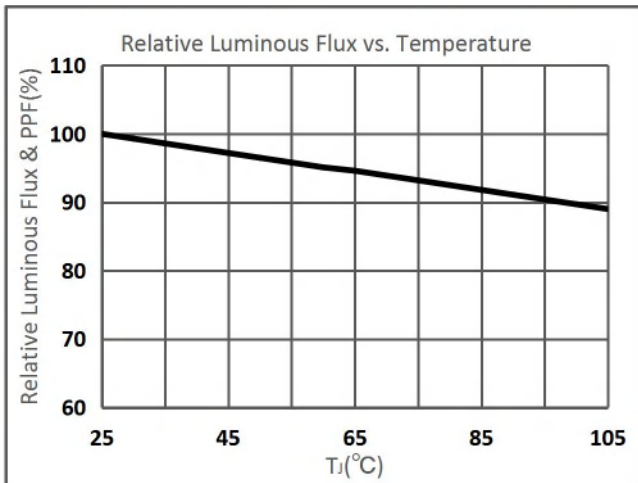


c) Forward Current Characteristics 电流曲线 ($T_j = 25^\circ\text{C}$)

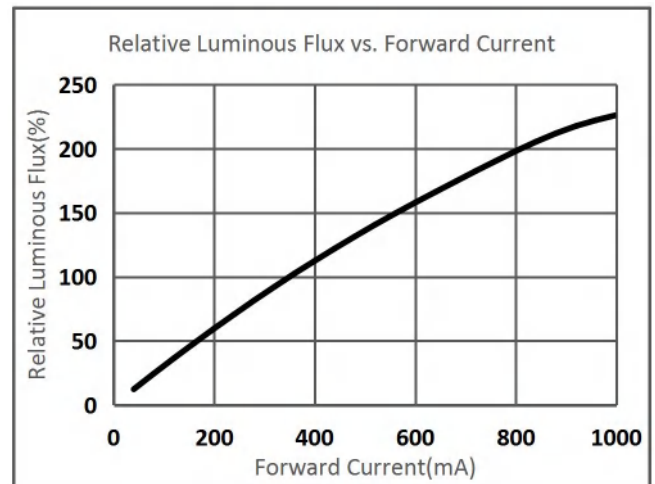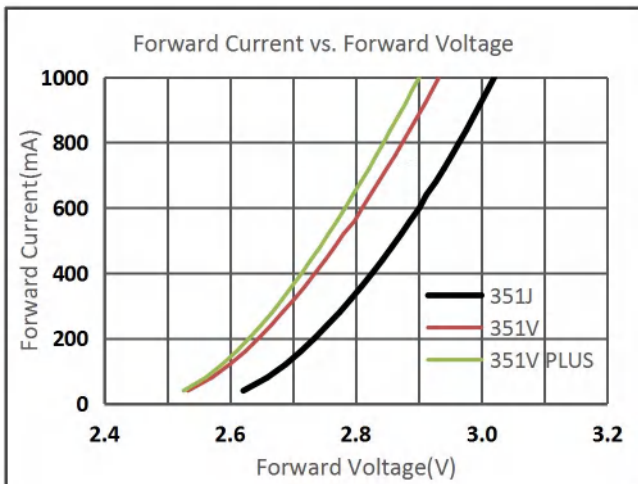


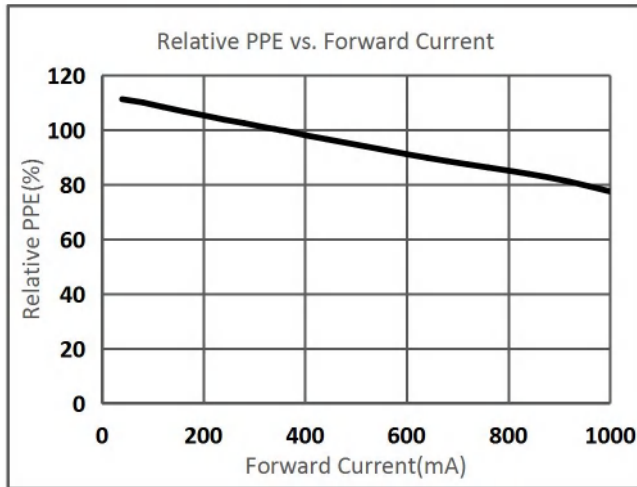


d) Color Shift Characteristics 颜色飘移曲线 ($T_J = 25^\circ\text{C}$)

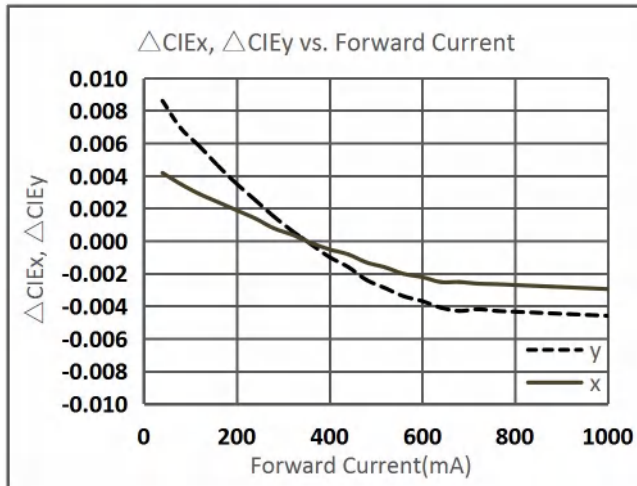

e) Derating Curve 电流下降曲线

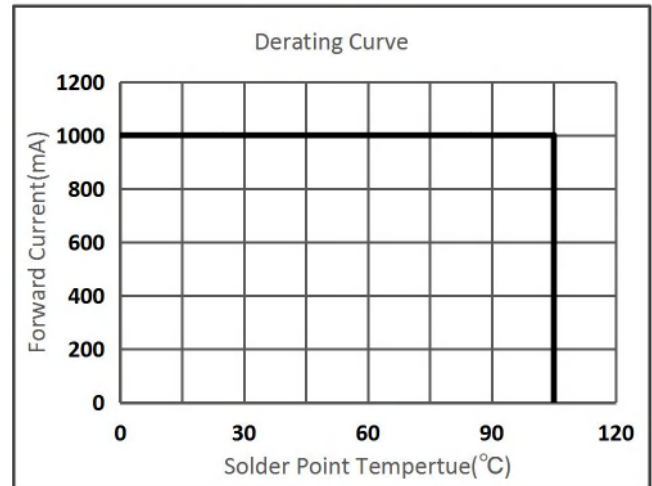


f) Beam Angle Characteristics 光束角 ($I_F = 350\text{ mA}$, $T_J = 25^\circ\text{C}$)

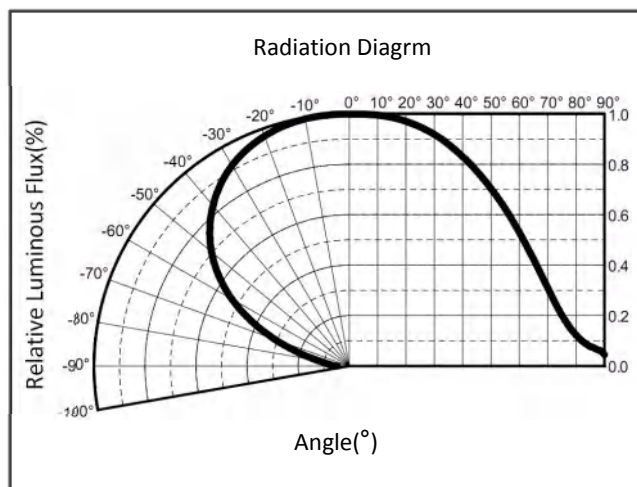

5. Outline Drawing & Dimension 外形图与尺寸


a) Lead Frame Outline Drawing & Dimension for circular plate 圆板支架外形尺寸图

(unit: mm)

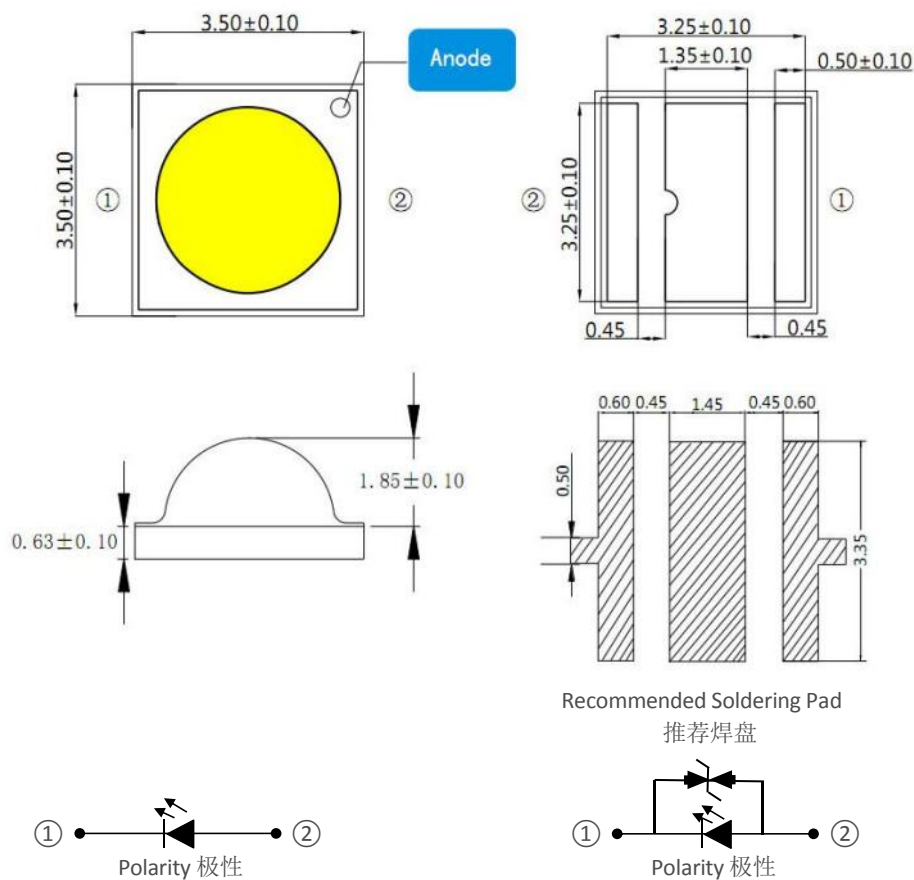


b) Lead Frame Outline Drawing & Dimension for gold-plated square plate 镀金方板支架外形尺寸图

(unit: mm)

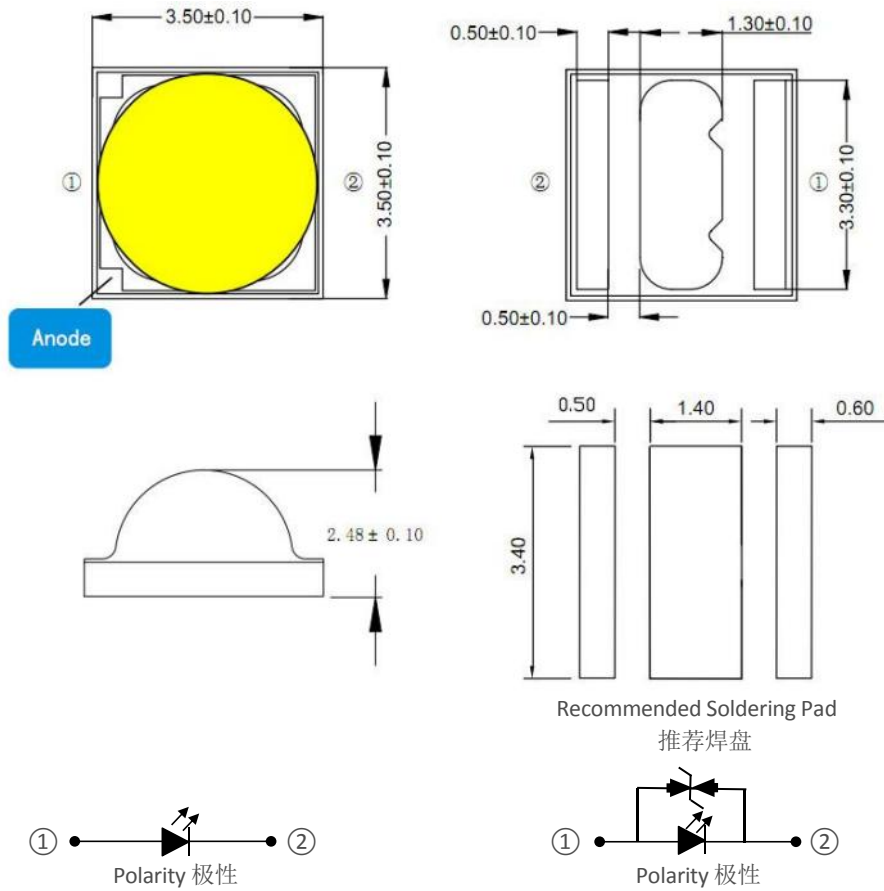

c) Lead Frame Outline Drawing & Dimension for silver-plated square plate 镀银方板支架外形尺寸图

(unit: mm)

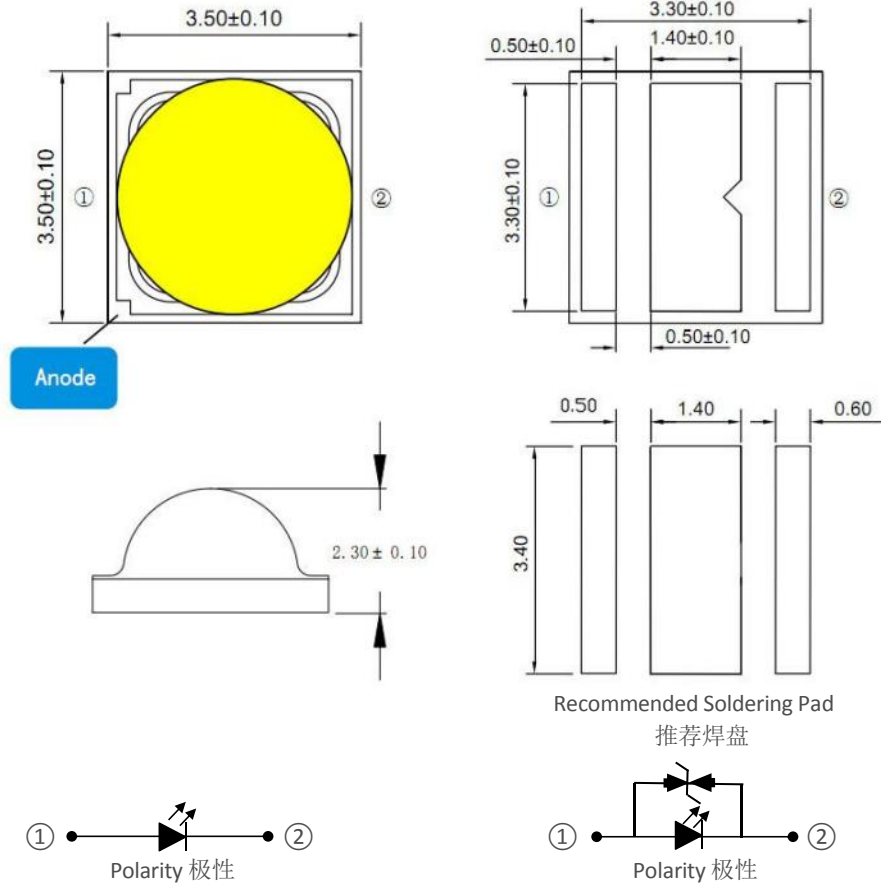

Notes 备注:

T_s point and measurement method:T_s 点及测量方法:

- ① Measure one point at the cathode pad, if necessary remove PSR of PCB to reach T_s point.
在负极焊盘处测量一个点，如有必要，移除PCB的阻焊层以接触T_s点。
- ② All pads must be soldered to the PCB to dissipate heat properly, otherwise the LED can be damaged.
所有焊盘都必须焊接到印刷电路板上，以便正确散热，否则LED可能会损坏。

Precautions 注意事项:

- 1) Pressure on the LEDs will influence to the reliability of the LEDs. Precautions should be taken to avoid strong pressure on the LEDs. Do not put stress on the LEDs during heating.
LED上方压力会影响其可靠性。应采取预防措施，避免对LED施加过大的压力。在加热过程中，切勿对LED施加应力。
- 2) Re-soldering should not be done after the LEDs have been soldered. If re-soldering is unavoidable, LED's characteristics should be carefully checked before and after such repair.
LED焊接后不建议进行重新焊接。若必须进行重新焊接，则应在修复前后仔细检查LED的特性。
- 3) Do not stack assembled PCBs together. Since materials of LEDs is soft, abrasion between two PCB assembled with LED might cause catastrophic failure of the LEDs.
请勿将组装好的印刷电路板堆叠在一起。由于LED的材料较软，两个装有LED的PCB之间的磨擦可能会导致LED发生故障。

6. Reliability Test Items & Conditions 可靠性测试项目与条件

a) Test Items 测试项目

Test Item 测试项目	Test Condition 测试条件	Test Hour / Cycle 测试时间/循环	Sample No. 样本数
Room Temperature Life Test 常温老化	25 °C, DC 1000 mA	1000 h	22
High Temperature Life Test 高温老化	85 °C, DC 1000 mA	1000 h	22
High Temperature Humidity Life Test 高温高湿老化	85 °C, 85% RH, DC 1000 mA	1000 h	22
Low Temperature Life Test 低温老化	-40 °C, DC 1000 mA	1000 h	22
Powered Temperature Cycle Test 温度循环老化	-40 °C ~ 85°C, each 10 min, On/Off 5 min, Temp. Change Time 20 min, DC 1000 mA	100 cycles	22
Thermal Shock 冷热冲击	-40 °C / 15 min ↔ 105 °C / 15 min	200 cycles	100
High Temperature Storage 高温储存	105 °C	1000 h	22
Low Temperature Storage 低温储存	-40 °C	1000 h	22

b) Criteria for Judging the Damage 失效判定标准


Test Item 测试项目	Symbol 符号	Test Condition (T _i = 25 °C) 测试条件	Limit 限制	
			Min. 下限	Max. 上限
Forward Voltage 正向电压	V _F	I _F = 1000 mA	L.S.L. * 0.9	U.S.L. * 1.1
Luminous Flux 光通量	Φ _v	I _F = 1000 mA	L.S.L. * 0.7	U.S.L. * 1.3

7. Soldering Condition 焊接条件

a) Reflow Conditions(Pb free) 回流焊条件（无铅）

Reflow frequency: 2 times max.

回流焊次数：最多2次

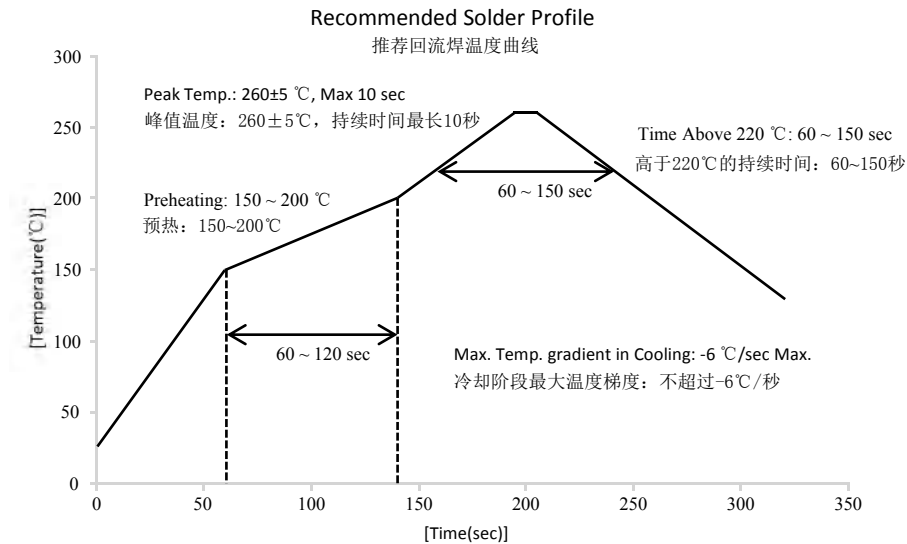

b) Manual Soldering Conditions 手动焊接条件



Not more than 5 seconds @ max. 300°C , under soldering iron.

在最高 300°C 的条件下，使用烙铁时，不得超过5秒。


8. Tape & Reel 卷带

a) Taping Dimension 卷带尺寸

(unit: mm)

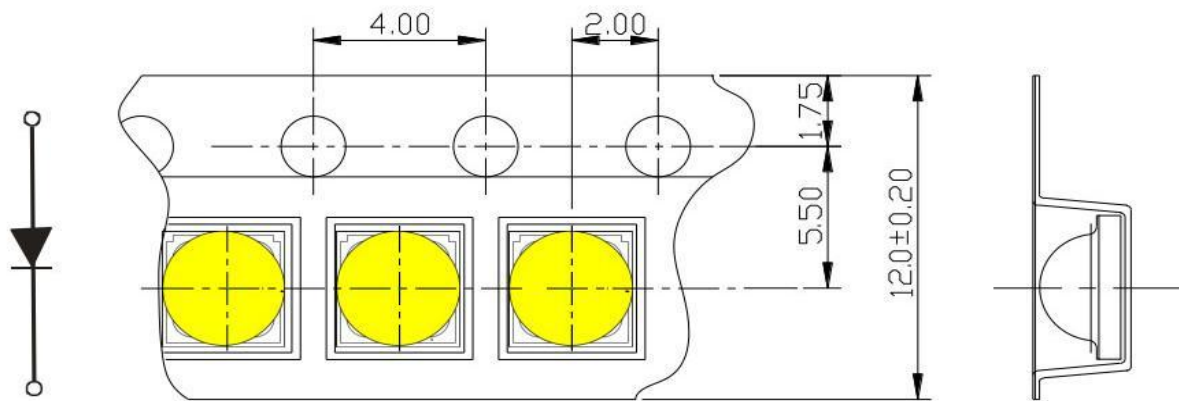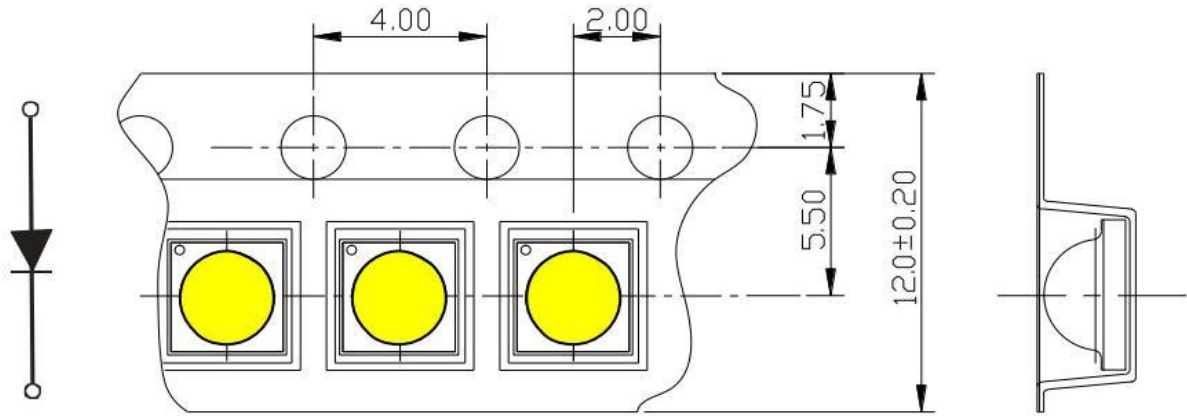

Taping Direction 编带方向 →

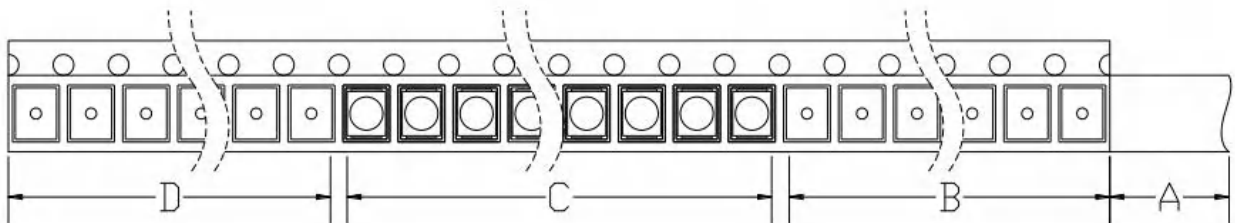


A: Top Cover Tape, 300 mm; B: Leader, Empty, 200 mm; C: 1000 or 3500 Lamps Loaded; D: Trailer, Empty, 200 mm.

b) Reel Dimension 卷轴尺寸


A: 7 inch diameter reel 7英寸直径卷轴

(unit: mm)

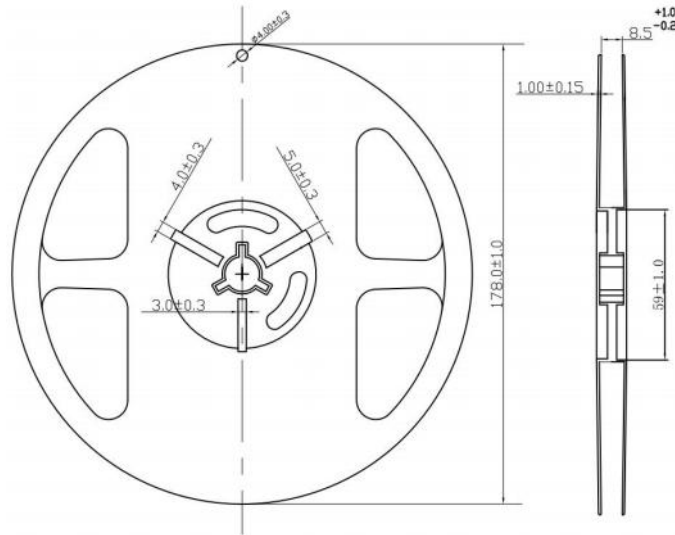

B: 13 inch diameter reel 13英寸直径卷轴

(unit: mm)

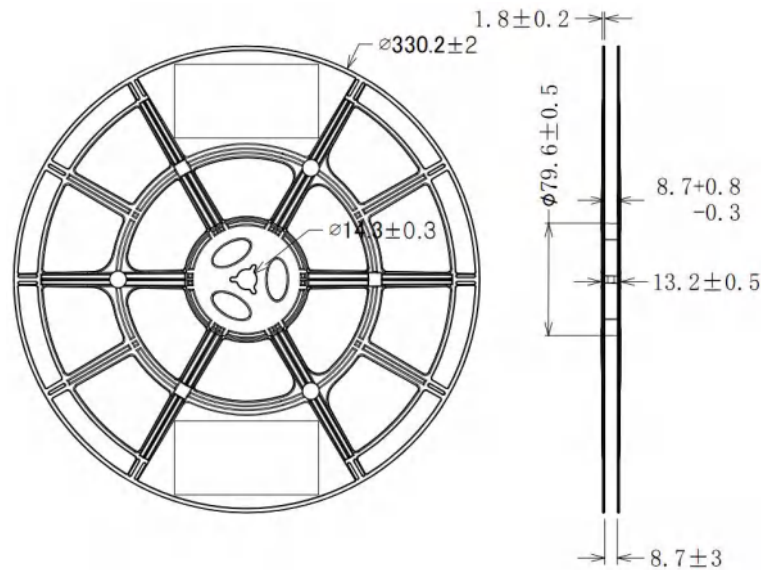

Notes 备注:

- Quantity: The quantity/reel is 1,000 pcs in 7 inch diameter reel, 3,500 pcs in 13 inch diameter reel.
数量: 每卷数量7英寸直径卷轴1,000颗, 13英寸直径卷轴3,500颗。
- Cumulative Tolerance: Cumulative tolerance / 10 pitches is ± 0.2 mm.
累积公差: 每10个孔距的累积公差为 ± 0.2 毫米。
- Adhesion Strength of Cover Tape: Adhesion strength is 0.1 - 0.7 N when the cover tape is turned off from the carrier tape at 10° angle to the carrier tape
盖带的粘合强度: 当盖带与载带成 10° 角从载带上剥离时, 粘合强度为0.1-0.7N。
- Packaging: P/N, Manufacturing data code no. and quantity are indicated on the aluminum packing bag.
包装: P/N、制造数据代码和数量显示在铝制包装袋上。

9. Label Structure 标签结构

a) Label Structure 标签结构



Note: Denoted bin code and product code above is only an example(see description on page 4 - 6)

备注：上述标签的BIN代码和产品代码仅为示例（具体见第4-6页的说明）

b) Label Explanation 标签说明

Part No.: Product Code（产品型号）

IF: Testing Current（测试电流）

VF: Forward Voltage Range（电压范围）

Flux: Luminous Flux Range（光通量范围）

PPE: Photosynthesis Photons Flux Efficiency Range（PPE范围）

Date: Packing Date（包装日期）

Bin Code: Rank（参数范围代码）

C/N: Internal Identification Code（内部识别料号）

Remark: Special Remark（特别备注）

QTY: Quantity（数量）

Lot No.: Production Batch Number（批号）

10. Packing Structure 包装结构

a) Packing Process (The quantity of PKG on the Reel to be Max 1,000 or 3,500 pcs) 包装过程 (每卷最大包装量1,000或3,500pcs)

Reel 卷轴



Progressive Direction 前进方向

Label 标签

Aluminum Vinyl Packing Bag 铝箔袋包装

Part No.:LDR-3535CLF4070(3535中性白)	
IF: 350mA	Bin Code:E2-A40-H0
VF: 2.7-2.8V	C/N:12230357
Flux:190-210LM	Remark:
PPE:2.50-2.70μmol/J	QTY: 1000pcs
Date:20251008	Lot No:LDR20251008001
使用前请70℃除湿24H	圆点正极
	
LED植物光源魔法师	

Outer Box 外箱包装



b) Aluminum Vinyl Packing Bag 铝箔袋包装



11. Precautions in Handling & Use 搬运和使用注意事项

- 1) For over-current protection, users are recommended to apply resistors connected in series with the LEDs to mitigate sudden change of the forward current caused by shift of forward voltage.
对于过电流保护，建议用户使用与LED串联的电阻器，以减轻正向电压偏移引起的正向电流的突然变化。
- 2) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When cleaning is required, IPA is recommended as the cleaning agent. Some solvent-based cleaning agent may damage the silicone resins used in the device.
该设备不应用于任何类型的流体，如水、油、有机溶剂等。当需要清洁时，建议使用IPA作为清洁剂。一些溶剂型清洁剂可能会损坏设备中使用的硅树脂。
- 3) When the device is in operation, the forward current should be carefully determined considering the maximum ambient temperature and corresponding junction temperature.
当设备运行时，应仔细考虑最高环境温度和相应的结温来确定正向电流。
- 4) LEDs must be stored in a clean environment. If the LEDs are to be stored for three months or more after being shipped from Ledestar, they should be packed with a nitrogen-filled container (shelf life of sealed bags is 12 months at temperature 0~40 °C, 0~90% RH).
LED必须存放在清洁的环境中。如果LED从立德达发货后要储存三个月或更长时间，则应使用充氮容器包装（密封袋在0~40°C、0~90%RH的温度下的保质期为12个月）。
- 5) After storage bag is opened, device subjected to soldering, solder reflow, or other high temperature processes must be:
 - a. Mounted within 672 hours (28 days) at an assembly line with a condition of no more than 30 °C / 60% RH, or
 - b. Mounted within 672 hours (28 days) at an assembly line with a condition of no more than 30 °C / 60% RH, or
 - c. Stored at <10% RH.打开储物袋后，经过焊接、回流焊或其他高温处理的设备必须：
 - a. 在672小时（28天）内安装在温度不超过30°C/60%相对湿度的装配线上，或
 - b. 在24小时（1天）内安装在温度超过30°C/70%RH的装配线上，或
 - c. 在相对湿度<10%的条件下储存。
- 6) Repack unused devices with anti-moisture packing, fold to close any opening and then store in a dry place.
用防潮包装重新包装未使用的LED，折叠以封闭任何开口，然后存放在干燥的地方。
- 7) Devices require baking before mounting, if humidity card reading is >60% at 23 ± 5 °C, Devices must be baked for 10~24 hours at 70 ± 5 °C, if baking is required.
如果湿度卡读数在23±5°C下>60%，则设备在安装前需要烘烤，如果需要烘烤，设备必须在70±5°C下烘烤10~24小时。
- 8) The LEDs are sensitive to the static electricity and surge current. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.
LED对静电和浪涌电流很敏感。处理LED时，建议使用腕带或防静电手套。如果向LED施加超过绝对最大额定值的电压，则可能会对LED器件造成损坏甚至破坏。损坏的LED可能会显示出一些异常特征，如漏电流增加、开启电压降低或LED在低电流下异常点亮。
- 9) VOCs (Volatile Organic Compounds) can be generated from adhesives, flux, hardener or organic additives used in luminaires (fixtures). Transparent LED silicone encapsulant is permeable to those chemicals and they may lead to a discoloration of encapsulant when they exposed to heat or light. This phenomenon can cause a significant loss of light emitted from the luminaires. In order to prevent these problems, we recommend users to know the physical properties of materials used in luminaires and they must be carefully selected.
挥发性有机化合物（VOC）可由灯具（固定装置）中使用的粘合剂、助焊剂、硬化剂或有机添加剂产生。透明LED硅胶封装材料可渗透这些化学物质，当它们暴露在高温或光照下时，可能会导致封装材料变色。这种现象会导致灯具发出的光大幅损失。为了防止这些问题，我们建议用户了解灯具中使用的材料的物理性能，必须仔细选择。
- 10) Risk of sulfurization (or tarnishing) The LED from Ledestar uses a silver-plated lead frame and its surface color may change to black (or dark colored) when it is exposed to sulfur (S), chlorine (Cl) or other halogen compound. Sulfurization of lead frame may cause intensity degradation, change of chromaticity coordinates and, in extreme cases, open circuit. It requires caution. Due to possible sulfurization of lead frame, LED should not be used and stored together with oxidizing substances made of materials such as rubber, plain paper, lead solder cream, etc.
硫化（或变色）风险，立德达的LED使用镀银支架，当暴露在硫（S）、氯（Cl）或其他卤素化合物中时，其表面颜色可能会变为黑色（或深色）。支架的硫化可能会导致亮度下降、色度坐标变化，在极端情况下还会导致断路。这需要谨慎。由于支架可能硫化，LED不应与橡胶、普通纸、铅焊膏等材料制成的氧化物质一起使用和储存。

12. Document Revision History 文件修订记录

[illegible]